





Freddy Products Ltd

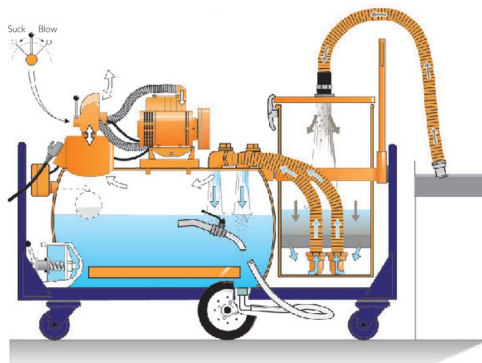

Features & Benefits

Suction and return

Suction rate of the Mk 5 is over four litres per second. The return rate is approximately two litres per second.

Tipping Filter

The Mk 5 tipping filter facility enables quick and easy removal of the 60 litre filter basket.

Overfill prevention system

A float assembly automatically stops suction when the tank is full, protecting the motors.

Motor Assembly

Motors and blowers create a vacuum for suction and pressure for return. Available in 110 volt, 240 volt, 415 volt and 48 volt DC options.

Four way valve

To change from suck to blow simply move the four-way valve lever. The machine is immediately put into return mode, without having to stop the motors.

Technical Specifications

Freddy Mk5

| Power Unit | Water Gauge mm | Air Flow ltr/min | Water Flow IN ltr/min | Water Flow OUT ltr/min | 500 ltr | | 310 ltr | |
|-------------|----------------|------------------|-----------------------|------------------------|-----------|-----------|-----------|-----------|
| | | | | | Height mm | Weight kg | Height mm | Weight kg |
| 110v 2kw | 3250 | 2100 | 235 | 130 | 1450 | 245 | 1320 | 232 |
| 240v 3kw | 3600 | 3000 | 265 | 130 | 1350 | 250 | 1220 | 237 |
| 415v 4kw | 3600 | 3800 | 260 | 110 | 1550 | 280 | 1420 | 267 |
| 415v 5.5kw | 4520 | 4500 | 250 | 140 | 1750 | 295 | 1620 | 282 |
| 415v 7.5kw | 3580 | 5900 | 330 | 130 | 1750 | 300 | 1620 | 287 |
| 415v 11.0kw | 3580 | 11,500 | 330 | 130 | 1820 | 315 | | |

All above units: Length 1950 mm, Width 500 ltr 770 mm, 310 ltr 670 mm.